

ShowerSelect Comfort E
Thermostat for concealed installation
Finish: **Chrome** Article Number: **15574000**



Description

product features

- temperature and volume control
- water flow control with stop function
- thermostat cartridge
- maximum flow rate at 3 bar: 28,8 l/min
- flow rate upper outlet: 23 l/min
- flow rate lower outlet: 23 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- Safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- material handles: metal
- connection type: basic set iBox universal 2 (# 01500180)


Technology




Design awards



Product image

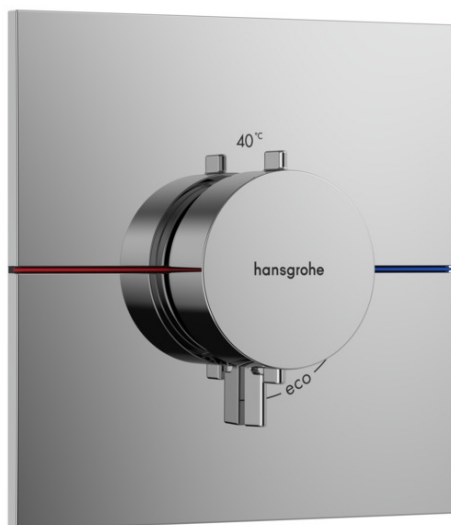

Scale drawing

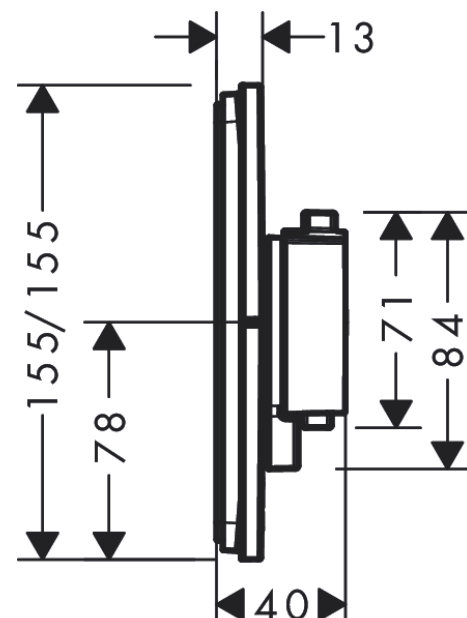

ShowerSelect Comfort E
Thermostat for concealed installation
 Finish: **Chrome** Article Number: **15574000**



Flowchart

