

ShowerSelect Comfort E

Thermostat for concealed installation for 2 functions with integrated security combination according to EN1717

Finish: **Brushed Black Chrome** Article Number: **15578340**




Description

product features

- 1 function and 1 additional outlet
- simultaneous use of several outlets
- comfortable turning on / off of one consumer with large Select-paddle
- water flow control with stop function
- thermostat cartridge, Start/stop valve to operate the functions
- maximum flow rate at 3 bar: 26 l/min
- flow rate upper outlet: 23 l/min
- flow rate lower outlet: 23 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- Safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- with integrated safety combination EN 1717
- material button: metal
- material handles: metal
- connection type: basic set iBox universal 2 (# 01500180)
- thermostat is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub

Technology



Design awards



ShowerSelect Comfort E

Thermostat for concealed installation for 2 functions with integrated security combination according to EN1717


Finish: **Brushed Black Chrome** Article Number: **15578340**



Product image



Scale drawing

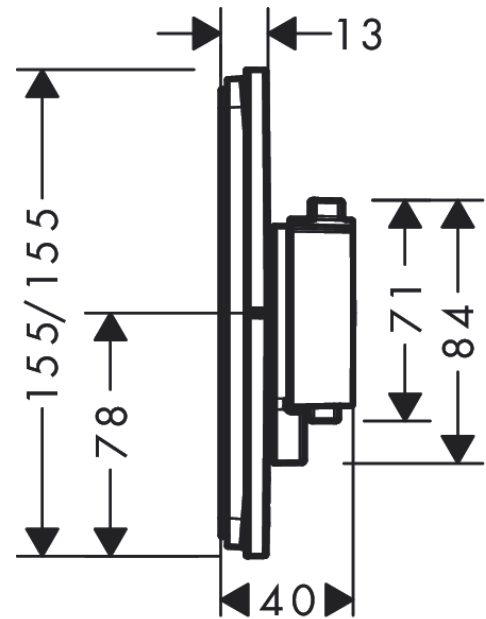

Flowchart

